

4

3

2

1

D

D

C

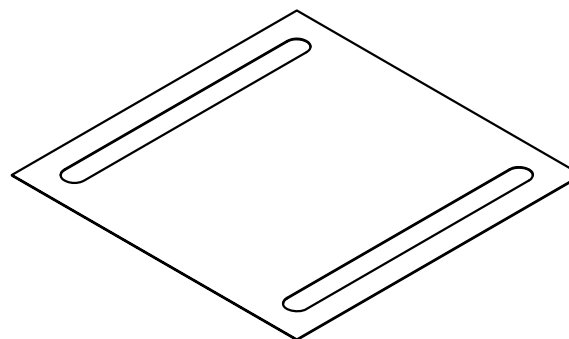
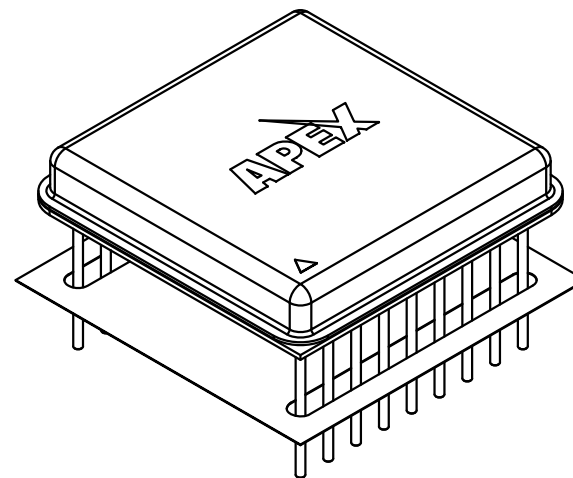
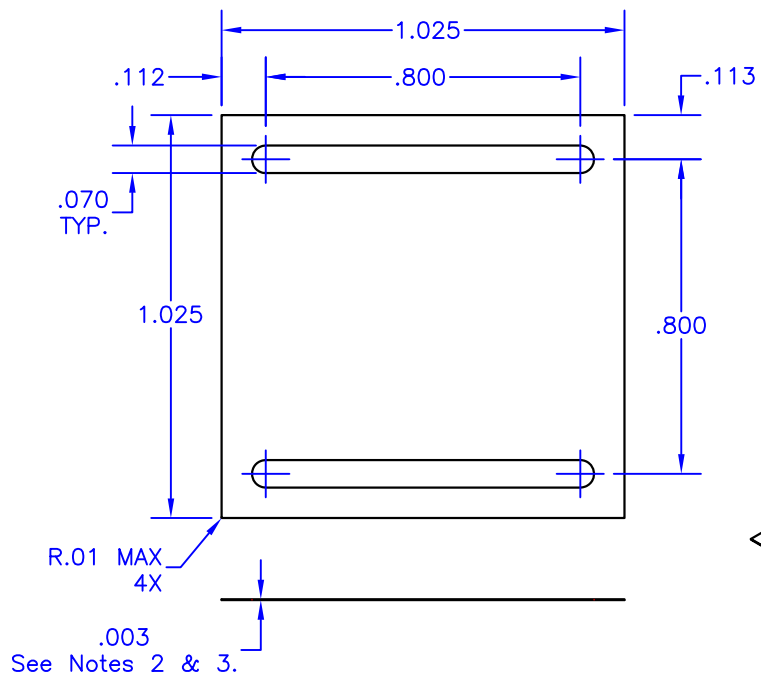
C

B

B

A

A

**NOTES:**

- Unless otherwise noted, all dimensions are in inches.
- Foil Material: .002 thick 1145 aluminum
- Interface Material: .0005 thick phase-change thermal compound, both sides.  
 Maximum shipping & storage temperature - 40°C  
 Reflow temperature - 60°C  
 Maximum recommended service temperature - 200°C
- Thermal impedance: .030 °C-in<sup>2</sup>/W (.194 °C-cm<sup>2</sup>/W) @ 20psi
- Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
- Used with 18-pin DIP package (Apex designator: EL).
- Power Devices part no. AL-103-103-APX

TOLERANCES - UNLESS OTHERWISE SPECIFIED	
.XX	= ±.01
.XXX	= ±.005
ANG.	= ±.5°



TITLE <b>THERMAL WASHER, DIP</b>					PART NO. <b>TW09</b>	
SUBJECT MECHANICAL DRAWING						
ENG. D-M	TECH/DRAW. P.ECK	DCA 80339	SHL 1	OF 1	FILENAME TW09	REV C
					DATE 03NOV08	

4

3

2

1